


series  
**200**  
2-Stage Servovalve  
Rated flows up to 7 l/m



**Features**

- Miniature design
- Maximum operating pressure 315 bar
- ISO 10372-01-01-0-92 mounting pattern
- Internal pilot supply (4 port)
- Suitable for 3-way or 4-way applications
- Low hysteresis & zero point drift
- High spool drive forces
- Spool in bushing design
- Dry torque motor with mechanical feedback
- Long life Sapphire Technology

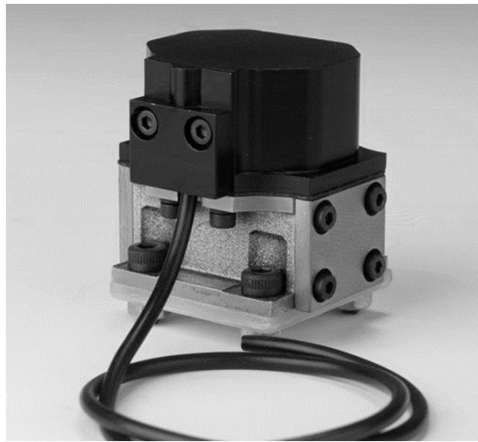

## Sapphire ball in slot design

- Incorporated into Star designs since 1988
- Many billions of cycles per service life
- Increased spool life due to spool rotation
- Ultra low coefficient of friction sapphire to steel
- Feedback mechanism unhindered by spool rotation
- Extended warranties available



## Safety

- Flame proof
- Intrinsic safety
- Class, Div & Zone coverage
- Mechanical failsafe
- Double & triple coil redundancy




## Quality

- Independent audit process is our commitment on quality
- Focus on customer needs and expectations
- Delivery schedules on time
- Continual improvements on products and services
- Maintaining design and manufacturing integrity

## Custom spool lap & bushing port geometries

- Zero overlap
- Overlap (closed center)
- underlap (open center)
- Dual gain
- Asymmetric gain

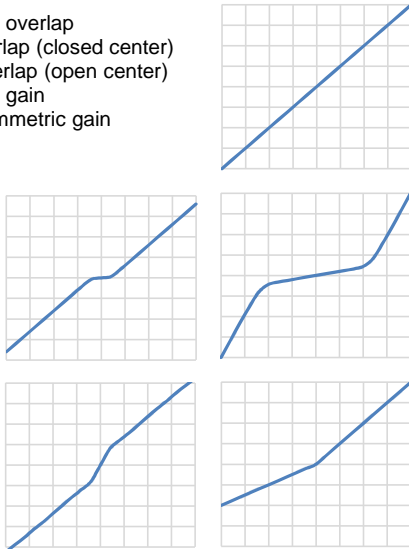

## Special projects

- Compact servo designs
- Special interfaces
- Modular components



## Sealing materials

- Nitrile
- Fluorocarbon (Viton)
- Ethylene-Propylene
- Fluorosilicone

## Sapphire flow

- Ensuring first stage stability
- Precisely matched flow properties
- Long life in extreme environments



## Special connectors


- MIL-C-5015
- MIL-DTL-38999
- Conduit style male/female
- Hermetic

## Technical data




Hydraulic		
Nominal flow ratings [ $\pm 10\%$ ]	at 70 bar $\Delta p$	2, 4, 7 l/m
Operating pressure (max)	Ports	P, C1, C2, R
Seal material	NBR, FPM	315 bar
	EPDM	210 bar
Fluid viscosity range (recommended)		10 to 100 mm <sup>2</sup> /s (cSt)
Fluid type		Mineral oil to ISO 11158, DIN 51524 or equivalent MIL-H-5606 Skydrol Kerosene Water glycols others on request
Filter rating (recommended)	Pressure line	Beta 10 = 200 (10 $\mu$ m abs), non by-pass & indicator
	Off-line	Beta 2 = 1000 (2 $\mu$ m abs)
Fluid cleanliness	ISO 4406: 1999	
	minimum	16/ 14/ 11
	recommended	15/ 13/ 10
Operational parameters		
Hysteresis		$\leq 3.0\%$ without dither
Threshold		$\leq 1.0\%$ without dither
Null shift	$\Delta T$ 40°C	$\leq 2.0\%$
Internal leakage	140 bar supply (0.5% overlap)	
	2, 4 l/m	$\leq 0.45$ l/m
	7 l/m	$\leq 0.8$ l/m
Load pressure difference	1% input	$\geq 30\%$ of supply pressure can be as high as 100%
Response time	0-100% rated spool stroke	6 ms
Mounting pattern		ISO 10372-01-01-0-92
Mounting position		Any, fixed or movable (1)
Weight	std unit	230 g
Design protection	EN 60529	IP 65
Shipping protection		Sealed base plate
Vibration		30 g all axis, 5 Hz to 2,000 Hz
Shock		30 g all axis
Seal material options		NBR, FPM, EPDM
Temperature range		-30 to 135 °C

## Technical data

### Electrical

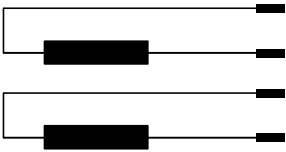Rated input ± (mA)	single (differential)	10	30
	series	5	15
	parallel	10	30
Coil resistance (Ω)	per coil	1000	300
Power (W)	single	0,1	0,270
	series	0,050	0,135
	parallel	0,050	0,135
Inductance (H) at 100 Hz	single	0,7	0,08
	series	2,2	0,2
	parallel	0,6	0,06
Coil lead out identification		Blue Red White Black	White Red Green Yellow
Polarity P»C2, C1»R	single	Blue +, Red - or White +, Black -	White +, Red - or Green +, Yellow -
	series	Blue +, Black -, Red & White linked	White +, Yellow -, Red & Green linked
	parallel	Blue & White linked +, Red & Black linked -	White & Green linked +, Red & Green linked -
Valve connection type		PTFE type A O/D 0.82 mm, core 7/0.15 mm 26 AWG 600 mm long flying lead	
Standard connector orientation		N/A	
	available over	P or R port; please advise when ordering	

# Technical data

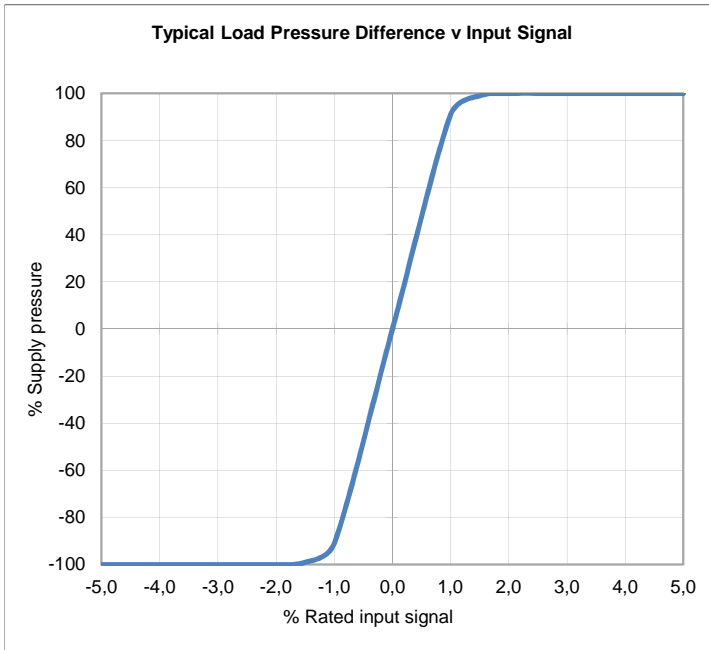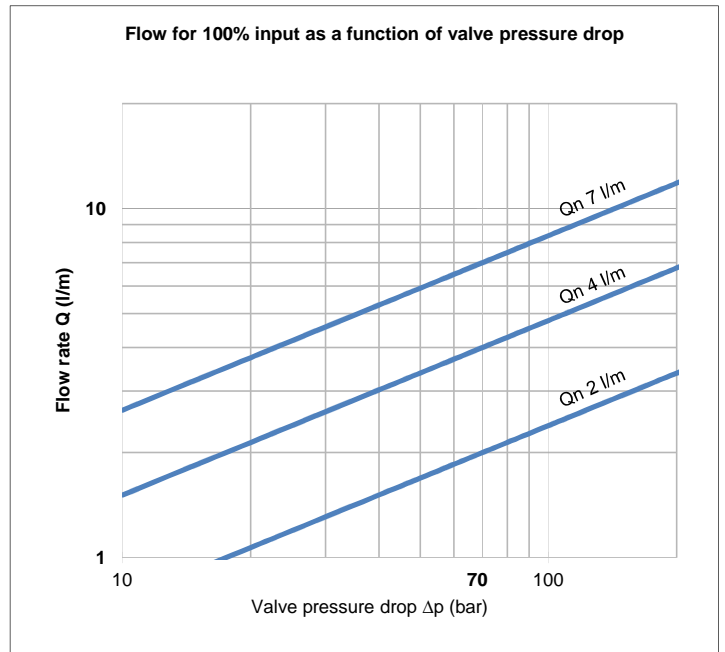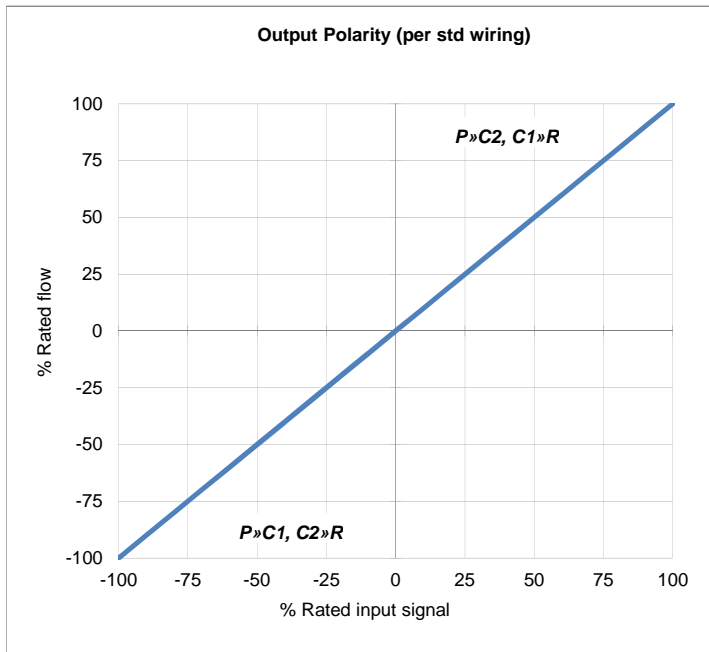


The flow tolerance for standard servovalves is  $\pm 10\%$  of the rated flow at 100% rated input signal.

Rated Signal [In] is the specified input voltage or current of either polarity to produce rated flow. Rated input does not include null bias values.



Rated flow corresponds to the flow at rated input at 10 bar or 70 bar, with no load, therefore in 4-way valves there will be a pressure drop of 5 bar or 35 bar respectively across each land.

Load pressure difference versus input signal indicates typical differential pressure gain between ports C1 (A) and C2 (B) for standard lap spools. Negative and positive overlap change this characteristic significantly.

Internal leakage comprises of tare first stage and laminar leakage between spool and sleeve. With critical lap conditions in 4-way designs the leakage peaks through the null region.




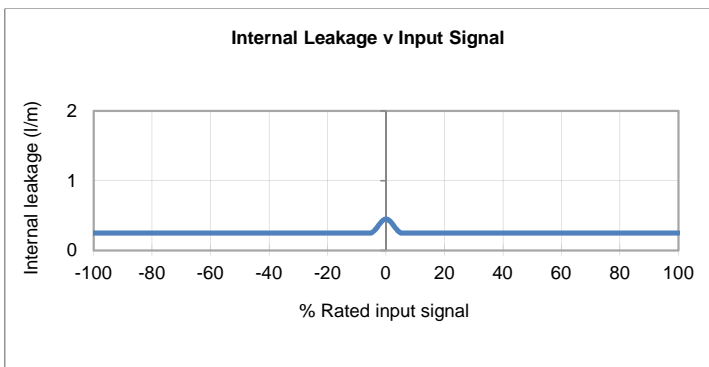


# Technical data

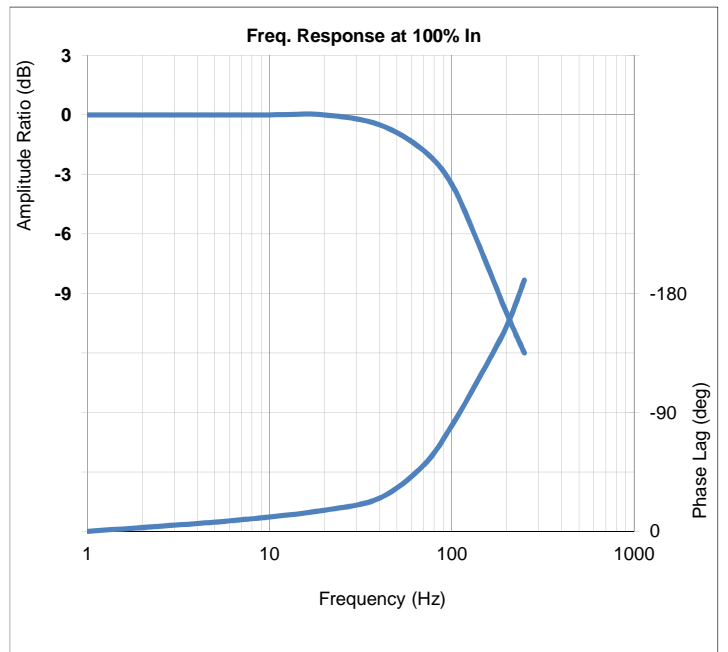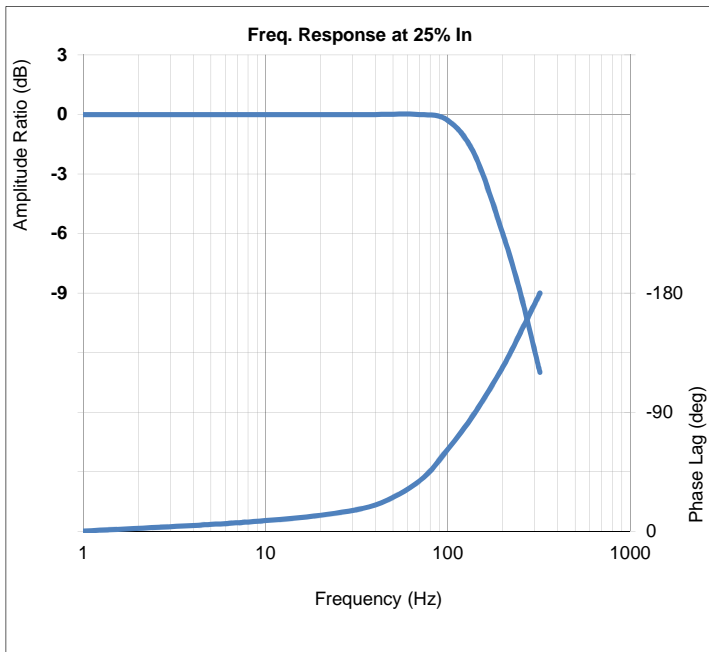

200 series  
INSTALLATION DETAILS

Mounting screws	Skt head cap screws M4 x 10 10.9 ISO 4762
Null adjust (Mechanical)	N/A
Porting details	P, C1, C2, R ports $\varnothing 4.0$ , $\square$ $\varnothing 8.0$ $\nabla 0.75$ on 12.2 P.C.D.
Interface seals	Ports P, C1, C2, R - ID 4.0 x $\varnothing 1.0$ O-Ring

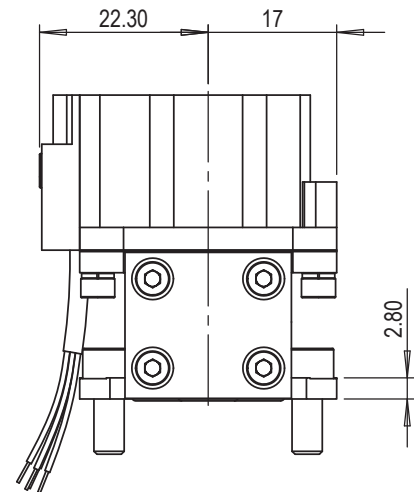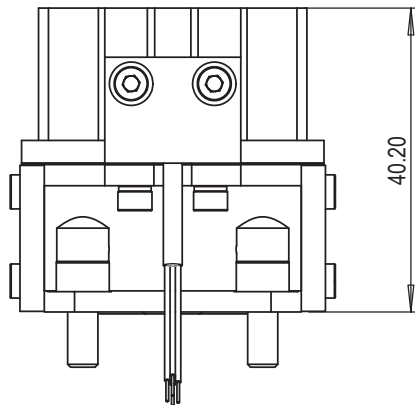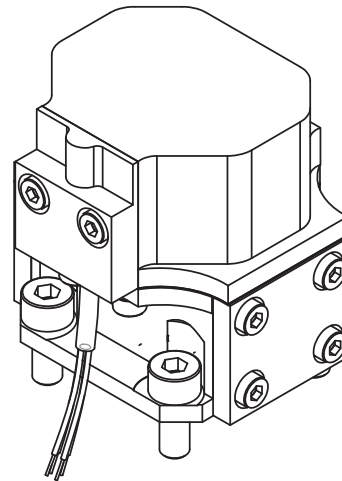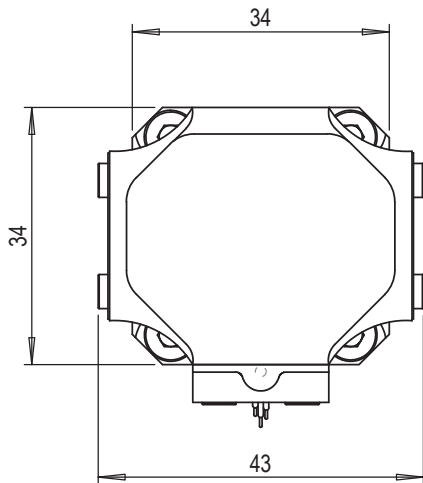

Mounting interface conforms to ISO 10372-01-01-0-92 (without locating pin)								
	P	C1	C2	R	F1	F2	F3	F4
size	$\varnothing 3.8$	$\varnothing 3.8$	$\varnothing 3.8$	$\varnothing 3.8$	M4	M4	M4	M4
x	11.90	5.80	18	11.90	35	23.80	23.80	0
y	7	13.10	13.10	19.20	0	0	26.20	26.20
Surface flat within 0.01 / 100 : finish better than 0.8 $\mu\text{m}$								

